

Chopper



Chopper 150
with optional cart and boom

Standard

Chopper internal mix	L-frame
Recirculation	7.5 m hoses
Adjustable dosing lever	Chopper gun with cutter SW II

Options

Conversion external mix	Catalyst failure control
Amount counter	Hardener Rotary Adjustment
Hose extension	Mobile cart
One or two piece boom	

Product Information

Save time and money compared to hand lay up

Fibre spraying is the most efficient open mould application. Save up to 30% time compared to hand layup and material costs while buying roving instead of glass mat.

The Wolfangel chopper has a minimum overspray and allows spraying tooling or filled resins as well as spray core.

Video fibre spraying: <http://youtu.be/DG3dGZvzeaM>


Video hardener rotary adjustment: <https://youtu.be/hXf4RKvQ-mY>

Chopper	150	300
Power	Compressed air	
Power supply	18.5:1	9.2:1
Max. air pressure	6 bar	
Air consumption	~ 600 l/min incl. SWII	
Capacity per double stroke	150 ccm	300 ccm
Max. output <small>(dep. on viscosity, hose length and diameter)</small>	~ 2.2 l/min	~ 4.5 l/min
Catalyst dosing ratio	1.1 – 3.4 %	1.4 – 3.5 %

Subject to technical modifications



Chopper gun
with cutter SW II

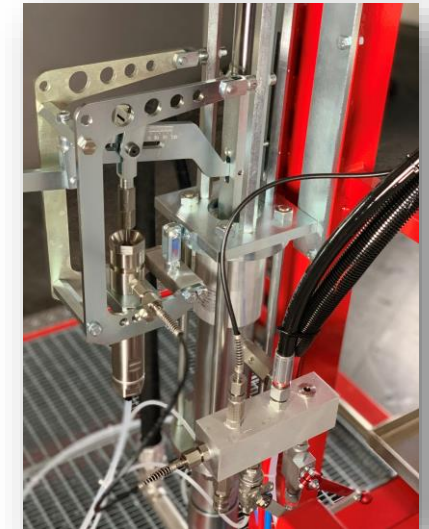

Chopper 150
Pump combination 150/SP06

